

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1538.1002/JDF

First Named Inventor or Application Identifier:

Masahiro WATANABE, et al.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 20]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 5]
4. ☒ Oath or Declaration [Total Pages: 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: / **18. CORRESPONDENCE ADDRESS**

21171

PATENT TRADEMARK OFFICE

**NEW APPLICATION
FEE TRANSMITTAL**

Attorney Docket No.	1538.1002/JDH
Application Number	To Be Assigned
Filing Date	November 16, 2000

 J0915 U.S. PTO
 09/714294

11/17/00

AMOUNT ENCLOSED	\$750.00	First Named Inventor	Masahiro WATANABE, et al.
-----------------	----------	----------------------	---------------------------

FEE CALCULATION (fees effective 10/01/00)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	20 - 20 =	0	X \$ 18.00 =	\$ 0.00
	INDEPENDENT CLAIMS	3 - 3 =	0	X \$ 80.00 =	0.00
	MULTIPLE DEPENDENT CLAIMS (any number; if applicable)			+ \$270.00 =	
	BASIC FILING FEE				710.00
	Total of above Calculations =				\$ 710.00
	Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)				+
	Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).				-
	TOTAL FILING FEE =				\$ 710.00
	Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))				+
	Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))				40.00
	TOTAL FEES DUE =				\$ 750.00

METHOD OF PAYMENT

- ☒ Check enclosed as payment.
- ☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
- ☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.

GENERAL AUTHORIZATION

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No.	19-3935
Deposit Account Name	STAAS & HALSEY LLP

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY LLP

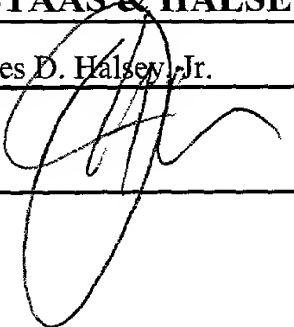
Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	November 16, 2000

Image Processing Apparatus and Method

TECHNICAL FIELD OF THE INVENTION

The present invention relates to an image processing technique, more particularly to an image processing technique for generating a clear multi-valued image from an input image that is generated by reading, as a multi-valued image, print contents into, and that includes printing dots and moire patterns.

BACKGROUND OF THE INVENTION

In a conventional art, first, an input image is generated by reading dotted contents of printed matter into a computer, as a multi-valued image. Then, printing dots, which are produced by printing, and interference fringes (moire patterns) are removed from the input image by a smoothing process. Thereafter, a contour emphasizing process is performed to recover contours for which level has been lowered by the smoothing process. Finally, a smooth multi-valued image (also called a multi-level image) is obtained.

In such a conventional process, however, when a high-level smoothing process is performed to remove as many as possible of the printing dots or moire patterns, the contour information for a portion of the input image having an originally low contour level is completely lost, so that the contour of that portion can not be recovered by the contour emphasizing process.

SUMMARY OF THE INVENTION

To resolve this shortcoming, it is an objective of the present invention to provide an image processing technique for generating a multi-valued image with distinct contours from an input image that is generated by

reading, as a multi-valued image, the dotted print contents of printed matter into, and that includes printing dots and moire patterns.

An image processing apparatus, that is a first aspect of the present invention, comprises: a contour image generator for generating a contour image from an input image generated by reading, as a multi-valued image, print contents (a dotted image) of printed matter into; a contour adder for adding contours to the contour image by referring to a contour density distribution in the contour image to generate a contour added image (an contour expanded image in the preferred embodiment); and an image synthesizer for superimposing the input image and a smoothed image obtained by performing a smoothing process for the input image, by referring to the contour added image, to generate a synthesized image (a superimposed image in the preferred embodiment). Since the contours are added in accordance with the contour density distribution in the contour image, a necessary contour portion can be recovered. As a result, a multi-valued image with distinct contours can be obtained.

The image processing apparatus of the first aspect of the present invention may also include means for performing a smoothing process for the input image to generate a smoothed image, and/or means for performing a contour extraction process for the input image to generate a contour extracted image.

The image processing apparatus of the first aspect may include a storage device for storing the input image, the contour image, the contour added image, the smoothed image, and the synthesized image.

The aforementioned contour image generator may include deletion means for deleting a contour pixel within the contour image, which satisfies at least one condition wherein a contour level of the contour pixel is equal

to or smaller than a first threshold value. By deleting contour pixels satisfying at least one condition in which a contour level of the contour pixels are equal to or smaller than a first threshold value, moire patterns and etc. which are included in the contour image can be removed. As a result, the multi-valued image with distinct contours can be obtained. The contour image from which contour pixels satisfying the aforementioned condition are deleted may be called as a partial contour image in the preferred embodiment.

Further, the first threshold value may be a value for a contour level higher than a contour level caused by printing dots that result from printing and moire patterns that occur when the print contents are read into. As a result, printing dots and moire patterns can be completely removed from the contour image.

The aforementioned contour adder may include determination means for scanning the contour image with a predetermined window, and for determining whether the density of contour pixels in the predetermined window is equal to or greater than a second threshold value. The density distribution of contours can be analyzed by scanning with the predetermined window.

In addition, the aforementioned contour adder may further include: means for calculating an average value of contour levels of contour pixels in the predetermined window; and change means for changing the contour level of a target pixel in the predetermined window to said average value if the density of the contour pixels in the predetermined window is equal to or greater than the second threshold value, and the contour level of the target pixel in the predetermined window is smaller than the average value. If the density of the contour pixels in the predetermined window is equal to or greater than the second threshold

value, and the target pixel in the predetermined window are not a contour pixel, the target pixel can be changed into a contour pixel.

It is possible to configure the aforementioned image synthesizer to determine a superimposition ratio for a pixel value of a pixel in the input image and a pixel value of a corresponding pixel in said smoothed image by referring to the contour levels of respective pixels in the contour added image, and to generate the synthesized image according to the superimposition ratio.

The aforementioned superimposition ratio may be determined by substituting the contour levels of the respective pixels in the contour added image into a predetermined function.

An image processing program, that is a second aspect of the present invention, causes a computer to perform the steps of: generating a contour image from an input image generated by reading, as a multi-valued image, print contents of printed matter into; adding contours to the contour image by referring to a contour density distribution in the contour image, and generating a contour added image; and superimposing the input image and a smoothed image obtained by performing a smoothing process for the input image, by referring to the contour added image, and generating a synthesized image.

Modifications of the first aspect of the present invention can be applied to the image processing program of the second aspect.

The image processing program is stored on a storage medium or a storage device, such as a floppy disk, a CD-ROM, a magneto-optical disk, a semiconductor memory or a hard disk.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating an overview of an image processing apparatus in accordance with an embodiment of the present invention;

Fig. 2a is a first portion of a flowchart showing the processing performed for the embodiment of the present invention;

Fig. 2b is a second portion of a flowchart showing the processing performed for the embodiment of the present invention;

Fig. 2c is a third portion of a flowchart showing the processing performed for the embodiment of the present invention;

Fig. 3 is a diagram showing the smoothing process performed by a smoothing unit 3;

Fig. 4 is a diagram showing the process performed by a contour generator 5;

Fig. 5 is a diagram showing the process performed by a contour expansion unit 7;

Fig. 6 is a diagram showing the process performed by an image synthesizer 9;

Fig. 7 is a diagram showing a function $F(X)$ used by the image synthesizer 9.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 is a functional block diagram illustrating an image processing apparatus according to the preferred embodiment of the present invention. The image processing apparatus comprises: an input unit 1, for generating an input image; a contour generator 5, for generating a contour extracted image and a partial contour image from the input image; a contour expansion unit 7, for generating a contour expanded image from the partial contour image; a smoothing unit 3, for generating a smoothed image from the input image; and an image synthesizer 9, for generating a superimposed image from the input image, the smoothed

image, and the contour expanded image. The input unit 1 is, for example, a scanner that optically reads printed matter 11 having dotted print contents into. The superimposed image that is output by the image synthesizer 9 is stored, for example, on a storage device 13. The input image, the contour extracted image, the partial contour image, the contour expanded image and the smoothed image, which are obtained during the processing, may be stored on the storage device 13.

The processing of the individual functions in Fig. 1 will now be described while referring to the flowchart in Fig. 2a, 2b and 2c. When the processing starts, the input unit 1 reads the printed matter 11 into the image processing apparatus as a multi-valued image, and generates an input image (step S2 in Fig. 2a). Since the input unit 1 performs the process in an unaltered conventional manner, no further explanation will be given for it. Then, the smoothing unit 3 receives the input image from the input unit 1, and smoothes the input image to obtain a smoothed image (step S3). For the smoothing process, a two-dimensional smoothing filter having a 3×3 pixel size is employed. In the filter, each weight coefficient is $1/9$. Note that these parameters are merely examples, and appropriate numerals can be selected so that the printed dots of the input image and the moire patterns caused by the printed dots of the input image are smoothed into the continuous gradation, that is, so that the moire patterns and etc. disappears. An example smoothing process is shown in Fig. 3. The input image shown on the left is shaded because of printing dots, whereas for the smoothed image (on the right) obtained by smoothing the input image, the printing dots and etc. are smoothed. Since the smoothing process is substantially the same as the conventionally performed one, no further explanation will be given for it.

The contour generator 5 receives the input image from the input unit 1, and performs the contour extraction process for the input image to obtain

a contour extracted image (step S5). The contour extraction process is a process for extracting the change point for a pixel density, and can be realized, for example, by performing a two-dimensional Sobel filtering process for the input image. The Sobel filtering process is a process for extracting a density change point for each set of three pixels, and includes a process for emphasizing the effect of the middle pixel. Since the contour extraction process is also performed substantially in the same manner of the conventional technique, no further explanation will be given for it.

Then, the contour generator 5 determines whether a contour level L1 of each pixel in the contour extracted image is equal to or smaller than a first threshold value T1 (step S7). The first threshold value T1 is a value higher than the contour levels due to the printing dots and moire patterns in the contour extracted image and lower than the contour levels of the other portion of the contour extracted image. This is because the printing dots and the moire patterns are distributed in various places in the extracted contour image, and their contour levels are low, while the actual contours appear thick in the contour extracted image and its contour level is high. In an actual case, it may be necessary to use a value obtained in accordance with an empirical rule as the first threshold value T1 during the step S7, S9 and S11, and to perform the step S7, S9, and S11 again after the value is adjusted slightly if a problem occurs.

If the contour level L1 is equal to or smaller than the first threshold value T1, the contour generator 5 sets the contour level of the target pixel to 0 (step S9). If the contour level L1 is greater than the first threshold value T1, the target pixel is not processed. The contour generator 5 repetitively performs the processing at steps S7 and S9 until all the pixels in the contour extracted image have been processed (step

S11). If all the pixels in the contour extracted image have been processed, a partial contour image is obtained. The processing is moved to Fig. 2b via the terminal A. Since the moire patterns and the printing dots are produced during the contour extraction process at step S5, and remain in the contour extracted image, the pixels of the contour level that are equal to or smaller than the first threshold value T1 are determined to be moire patterns and etc, and are deleted from the contour extracted image. At this time, the actual contour, which should not be deleted, is also deleted if the contour level is low.

The processing at steps S5, S7, S9 and S11 is shown in Fig. 4. The input image on the left is the one shown in Fig. 3. If the contour extraction process is performed for this input image, the contour extracted image in the middle of Fig. 4 is obtained. The contour extracted image includes actual contours that represent the figure of a person and the contours caused by printing dots and moire patterns. The contour separation process is performed to delete the contour caused by the printing dots and the moire patterns in accordance with the first threshold value T1, which is appropriately set. The partial contour image that is the result of the contour separation process is shown on the right. While emphasized in the partial contour image, the actual contours that represent the figure of a person are cut into segments, and an image with clear contours can not be generated.

Therefore, the contour expansion unit 7 scans the partial contour image using a predetermined two-dimensional window, and then counts the number of the pixels in the window that do not have a contour level of 0. In addition, the contour expansion unit 7 calculates an average value A for the contour levels of the pixels in the window having a contour level that is not 0 (step S13 in Fig. 2b). The two-dimensional window has a pixel size of 5×5 , for example.

The contour expansion unit 7 determines whether the ratio C/S (S denotes the number of all the pixels present in the window) which means the ratio of the pixels in the window having a contour level that is not 0 is equal to or greater than the second threshold value ($0 \leq T2 \leq 1$), and the contour level of the target pixel in the center of the window is smaller than the average value A (step S15). For example, the second threshold value $T2$ is 0.1. The second threshold value $T2$ is determined in accordance with how much of the contours in the partial contour image are to be recovered or added. If a large value is used as the second threshold value $T2$, of the contours, little is recovered or added. Whereas if a low value is used as the second threshold value $T2$, of the contours, much is recovered or added. Also in this case, it may be necessary to use a value obtained in accordance with an empirical rule as the second threshold value $T2$ during the step S13, S15 and S17, and to perform the step S13, S15, and S17 again after the value is adjusted slightly if a problem occurs.

If the condition at step S15 is satisfied, the contour expansion unit 7 changes the contour level of the target pixel to the average A (step S17). But if the condition at step S15 is not satisfied, i.e., if the ratio of the pixels in the window having a contour level which is not 0 is less than the second threshold value $T2$ or the contour level of the target pixels is equal to or greater than the average value A , no process is performed for the target pixel. The contour expansion unit 7 repeats the processing at steps S13, S15 and S17 until all the pixels are processed (step S19), and as a result, generates the contour expanded image. The processing is moved to Fig. 2c via the terminal B.

An example process performed by the contour expansion unit 7 is shown in Fig. 5. The partial contour image in Fig. 4 is shown on the left, and

the enlarged portion of the partial contour image is shown in the middle in Fig. 5. As shown in Fig. 5, the contour that is originally continued becomes discontinuous during the contour separation process. The result of the contour expansion process performed for this partial contour image is shown in the right of Fig. 5. The image that is thus obtained is shown on the right in Fig. 5. The solid black pixels are contour pixels that were already present in the partial contour image, and the shaded pixels are those that are recovered or added when the contour expansion process was performed. As shown on the right in Fig. 5, the discontinuous contour portions are linked together by contour pixels that are recovered or added. In addition, contour pixels that are recovered or added to expand the contour are provided around the contour pixels that were already present in the partial contour image. Therefore, if the contour density distribution in the partial contour image is analyzed by scanning the image using the two dimensional window, and the contour pixels are generated in accordance with the contour density distribution, the original contour portions that were deleted during the contour separation process can be recovered, and an image with clear contours can be obtained.

Through the above processing, all image data are generated that are to be used by the image synthesizer 9. As shown in Fig. 6, the image synthesizer 9 scans the respective pixels of the input image, the smoothed image and the contour expanded image in the same manner, superimposes the input image and the smoothed image while referring to the contour expanded image, and generates a superimposed image. During the superimposing process, for each pixel in the contour expanded image whose contour level is high, a pixel value of a corresponding pixel in the input image rather than the smoothed image is employed with priority to determine the pixel value of the corresponding pixel in the superimposed image. For each pixel in the contour expanded image

whose contour level is low, a pixel value of a corresponding pixel in the smoothed image rather than the input image is employed with priority. More specifically, the following processing is performed.

First, the image synthesizer 9 substitutes into a function $F(X)$ the contour level value $L2$ of a target pixel in the contour expanded image, and obtains a function output value (step S21 in Fig. 2c). In this case, for example, the function $F(X)$ is a monotone, non-decreasing function that falls within the range represented by $0 \leq F(X) \leq 1$. It has been found through experience that a convex function is preferable to obtain satisfactory results. More specifically, $F(X) = (X/255)^{1/2}$ is used, wherein X is a contour level value and falls within the range represented by $0 \leq X \leq 255$. That is, in this example there are 256 contour levels. $F(X) = (X/255)^{1/2}$ is shown in Fig. 7. The output value ranges from 0 to 1, and represents an upward convex function. At step S21, $F(L2)$ is calculated.

Then, the image synthesizer 9 employs the function output value $F(L2)$ to determine the superimposition ratio of the pixel values for the target pixels in the input image and the smoothed image (step S23). In this embodiment, the superimposition rate of the pixel value for the input image is $F(L2)$, and the superimposition rate of the pixel value for the smoothed image is $1-F(L2)$. That is, the superimposition ratio of these pixel values is $F(L2):(1-F(L2))$, which is also represented in Fig. 7. The portion below the function $F(X)$ represents the superimposition rate of the pixel value for the input image, and the portion above the function $F(X)$ represents the superimposition rate of the pixel value for the smoothed image. The image synthesizer 9 superimposes the pixel values of the target pixels in the input image and the smoothed image in accordance with the superimposition rates (step S25). If the pixel value of a pixel in the input image is defined as $L3$ and the pixel value of a corresponding pixel in the smoothed image is defined as $L4$, the pixel

value of the target pixel is $F(L2) \times L3 + (1-F(L2)) \times L4$. The above processing performed at steps S21, S23 and S25 is repeated for all the pixels (step S27). As a result, for each pixel in the contour expanded image whose contour level is high, a pixel value of a corresponding pixel in the input image rather than the smoothed image is employed with priority to determine the pixel value of the corresponding pixel in the superimposed image. For each pixel in the contour expanded image whose contour level is low, a pixel value of a corresponding pixel in the smoothed image rather than the input image is employed with priority to determine the pixel value of the corresponding pixel in the superimposed image.

The image synthesizer 9 controls the superimposition ratio in a level-less manner by using the continuous function $F(X)$ that employs, as input parameters, the contour levels of the individual pixels in the contour expanded image. Thus, the borders between the contours of the superimposed image and the other portions can be smoothed, so that a multi-valued image having a more natural appearance can be obtained.

Through the above processing, an image in which regions which include a lot of printing dots and moire patterns are smoothed with continuous gradation (the smoothed image is used with priority.) and in which an original image (the input image) information of contour portions which do not include printing dots and moire patterns so much is maintained can be generated from printed matter which includes dotted print contents. As a result, a multi-valued image having a more natural appearance can be obtained.

As described above, an image processing apparatus of the embodiment generates a contour extracted image by performing the contour extraction process for the input image, and deletes contours from the contour extracted image that satisfy a predetermined condition to generate a

partial contour image. Then, it adds contours to the partial image in accordance with the density distribution of the contour in the partial contour image, and generates a contour added image. By referring to the contour added image, it superimposes the input image and a smoothed image obtained by performing a smoothing process for the input image to generate a synthesized image. Since contours that satisfy a predetermined condition are deleted from the contour extracted image, the moire patterns included in the contour extracted image are removed. In addition, since contours are added according to the density distribution of the contour, necessary contours can be recovered.

The above embodiment is merely an example, and can be variously modified. For instance, the division manner of the functional blocks is not limited to that shown in Fig. 1, and the contour generator 5 may be divided into a contour extractor (step S5 in Fig. 2a) and a contour separator (for portions at other than step S5 in Fig. 2a). Further, the input unit 1 may not be included, and instead, an input image can be generated by another device. In addition, the contour extractor (step S5 in Fig. 2a) may be provided for a separate device.

Furthermore, at step S15 in Fig. 2, as a condition, the ratio of pixels in the window having a contour level that is not 0 is equal to or greater than the second threshold value, and the contour level of the target pixel is smaller than the average value A. However, as another condition, the ratio of pixels in the window having a contour level that is not 0 may be equal to or greater than the second threshold value, while the contour level of the target pixel may be 0. Since before step S15 a pixel having a contour level that is not 0 has a contour level that is equal to or greater than the first threshold value, the contour is not lost even if no particular process is performed for a pixel that has a contour level that is not 0 but that is smaller than the average value A. In accordance with

this condition, only those contour pixels are generated that are to be newly added.

The threshold values, the window and the function are merely examples, and various values can be employed for the properties of the input image.

To execute the processing in Fig. 2, either a program or a dedicated circuit may be prepared. If such a program is prepared, the program can be stored on a storage medium or a storage device, such as a floppy disk, a CD-ROM, a DVD, an HDD or a semiconductor memory.

As shown above, the present invention can provide an image processing technique for generating a multi-valued image with clear contours from an input image that is generated by reading, as a multi-valued image, the dotted print contents of printed matter into, and that includes printing dots and moire patterns.

Although the present invention has been described with respect to a specific preferred embodiment thereof, various change and modifications may be suggested to one skilled in the art, and it is intended that the present invention encompass such changes and modifications as fall within the scope of the appended claims.

What is claimed is:

1. An image processing apparatus comprising:

a contour image generator for generating a contour image from an input image generated by reading, as a multi-valued image, print contents of printed matter into;

a contour adder for adding contours to said contour image by referring to a contour density distribution in said contour image to generate a contour added image; and

an image synthesizer for superimposing said input image and a smoothed image obtained by performing a smoothing process for said input image, by referring to said contour added image, to generate a synthesized image.

2. The image processing apparatus according to claim 1, wherein said contour image generator includes deletion means for deleting a contour pixel within said contour image, said contour pixel satisfying at least one condition wherein a contour level of said contour pixel is equal to or smaller than a first threshold value.

3. The image processing apparatus according to claim 2, wherein said first threshold value is a value for a contour level higher than a contour level caused by printing dots that result from printing and moire patterns that occur when the print contents are read into.

4. The image processing apparatus according to claim 1, wherein said contour adder includes determination means for scanning said contour image with a predetermined window, and for determining whether a density of contour pixels in said predetermined window is equal to or greater than

a second threshold value.

5. The image processing apparatus according to claim 4, wherein said contour adder further comprises:

means for calculating an average value of contour levels of contour pixels in said predetermined window; and

change means for changing the contour level of a target pixel in said predetermined window to said average value if the density of the contour pixels in said predetermined window is equal to or greater than the second threshold value and the contour level of target pixel in said predetermined window is smaller than said average value.

6. The image processing apparatus according to claim 1, wherein said image synthesizer determines a superimposition ratio for a pixel value of a pixel in said input image and a pixel value of a corresponding pixel in said smoothed image by referring to the contour levels of respective pixels in said contour added image.

7. The image processing apparatus according to claim 6, wherein said superimposition ratio is determined by substituting said contour levels of said respective pixels in said contour added image into a predetermined function.

8. An image processing method comprising the steps of:

generating a contour image from an input image generated by reading, as a multi-valued image, print contents of printed matter into;

adding contours to said contour image by referring to a contour density distribution in said contour image and generating a contour added image; and

superimposing said input image and a smoothed image obtained by performing a smoothing process for said input image, by referring to said contour added image, and generating a synthesized image.

9. The image processing method according to claim 8, wherein said generating step includes a step of deleting a contour pixel within said contour image, said contour pixel satisfying at least one condition wherein a contour level of said contour pixel is equal to or smaller than a first threshold value.

10. The image processing method according to claim 9, wherein said first threshold value is a value for a contour level higher than a contour level caused by printing dots that result from printing and moire patterns that occur when the print contents are read into.

11. The image processing method according to claim 8, wherein said adding step includes a step of scanning said contour image with a predetermined window, and determining whether a density of contour pixels in said predetermined window is equal to or greater than a second threshold value.

12. The image processing method according to claim 11, wherein said adding step further comprises the steps of:

calculating an average value of contour levels of contour pixels in said predetermined window; and

changing the contour level of a target pixel in said predetermined window to said average value if the density of the contour pixels in said predetermined window is equal to or greater than the second threshold value and the contour level of target pixel in said predetermined window is smaller than said average value.

13. The image processing method according to claim 8, wherein said synthesizing step comprises a step of determining a superimposition ratio of a pixel value of a pixel in said input image and a pixel value of a corresponding pixel in said smoothed image by referring to the contour levels of respective pixels in said contour added image.

14. A storage medium for storing an image processing program, said image processing program comprising the steps of:

generating a contour image from an input image generated by reading, as a multi-valued image, print contents of printed matter into;

adding contours to said contour image by referring to a contour density distribution in said contour image, and generating a contour added image; and

superimposing said input image and a smoothed image obtained by performing a smoothing process for said input image, by referring to said contour added image, and generating a synthesized image.

15. The storage medium according to claim 14, wherein said generating step includes a step of deleting a contour pixel within said contour image, said contour pixel satisfying at least one condition wherein a contour level of said contour pixel is equal to or smaller than a first threshold value.

16. The storage medium according to claim 15, wherein said first threshold value is a value for a contour level higher than a contour level caused by printing dots that result from printing and moire patterns that occur when the print contents are read into.

17. The storage medium according to claim 14, wherein said adding step includes a step of scanning said contour image with a predetermined

window, and determining whether a density of contour pixels in said predetermined window is equal to or greater than a second threshold value.

18. The storage medium according to claim 17, wherein said adding step further comprises the steps of:

calculating an average value of contour levels of contour pixels in said predetermined window; and

changing the contour level of a target pixel in said predetermined window to said average value if the density of the contour pixels in said predetermined window is equal to or greater than the second threshold value and the contour level of target pixel in said predetermined window is smaller than said average value.

19. The storage medium according to claim 14, wherein said synthesizing step comprises a step of determining a superimposition ratio for a pixel value of a pixel in said input image and a pixel value of a corresponding pixel in said smoothed image by referring to the contour levels of respective pixels in said contour added image.

20. The storage medium according to claim 19, wherein said superimposition ratio is determined by substituting said contour levels of said respective pixels in said contour added image into a predetermined function.

Abstract

The object of the present invention is to provide an image processing technique for generating a multi-valued image with fine contours from an input image that is generated by reading, as a multi-valued image, the dotted print contents of printed matter into. An image processing apparatus of the present invention generates a contour extracted image by performing the contour extraction process for the input image, and deletes contours from the contour extracted image that satisfy a predetermined condition to generate a partial contour image. Then, it adds contours to the partial image according to the density distribution of the contour in the partial contour image, and generates a contour added image. By referring to the contour added image, it superimposes the input image and a smoothed image obtained by performing a smoothing process for the input image to generate a synthesized image. Since contours that satisfy a predetermined condition are deleted from the contour extracted image, the moire patterns included in the contour extracted image are removed. In addition, since contours are added according to the density distribution of the contour, necessary contours can be recovered.

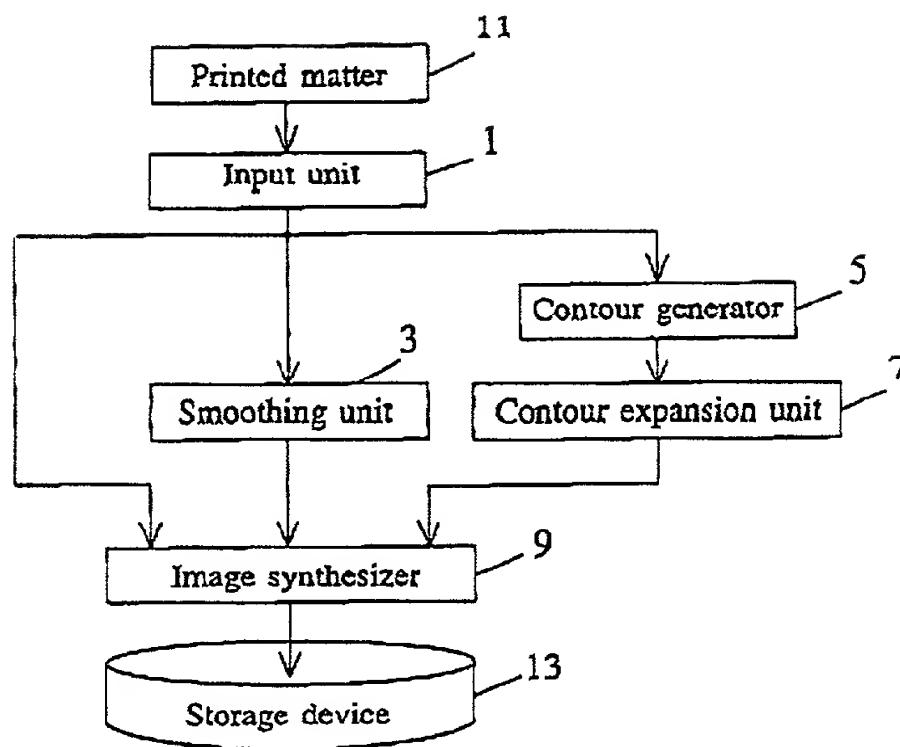


FIG.1

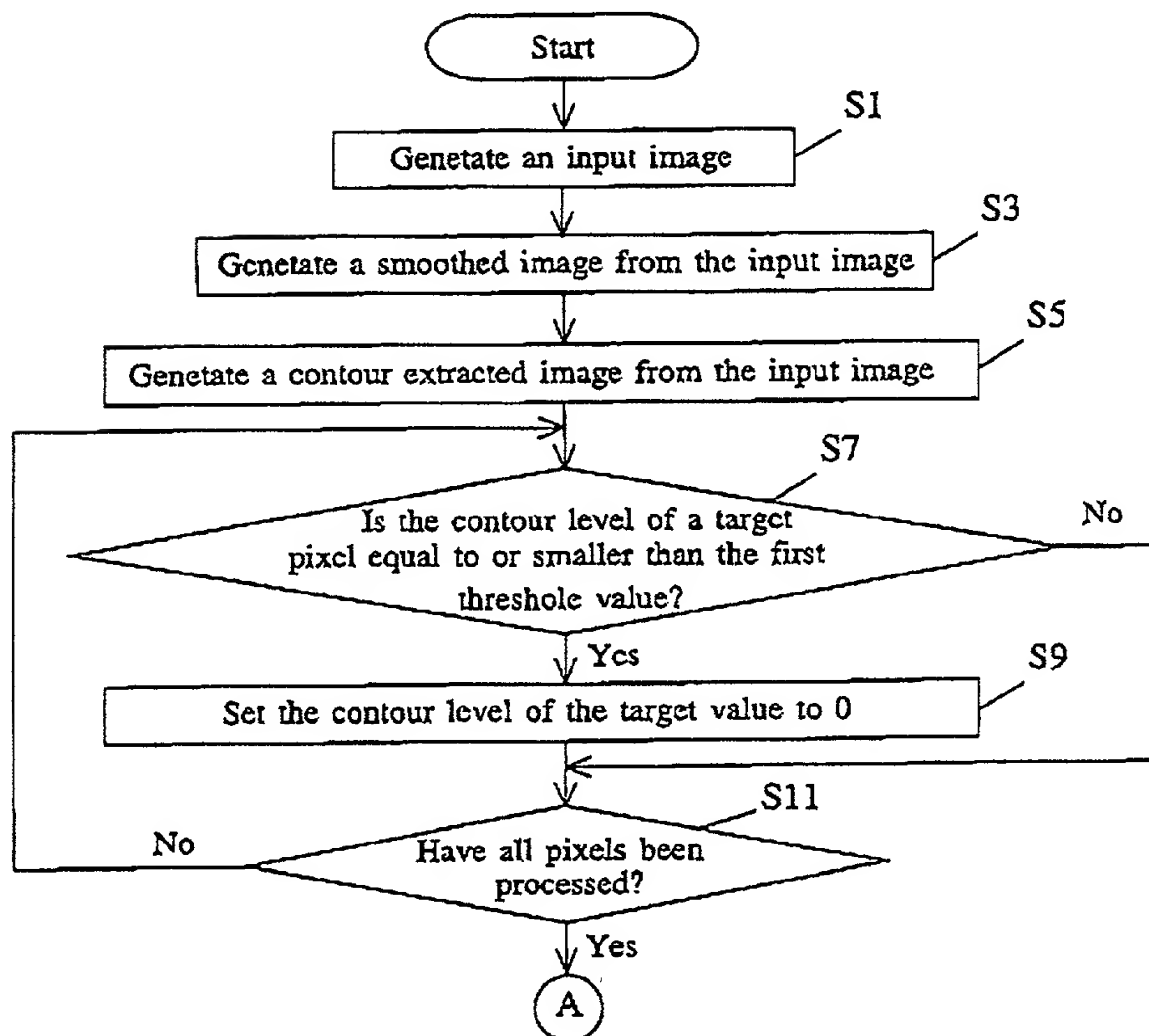


FIG.2a

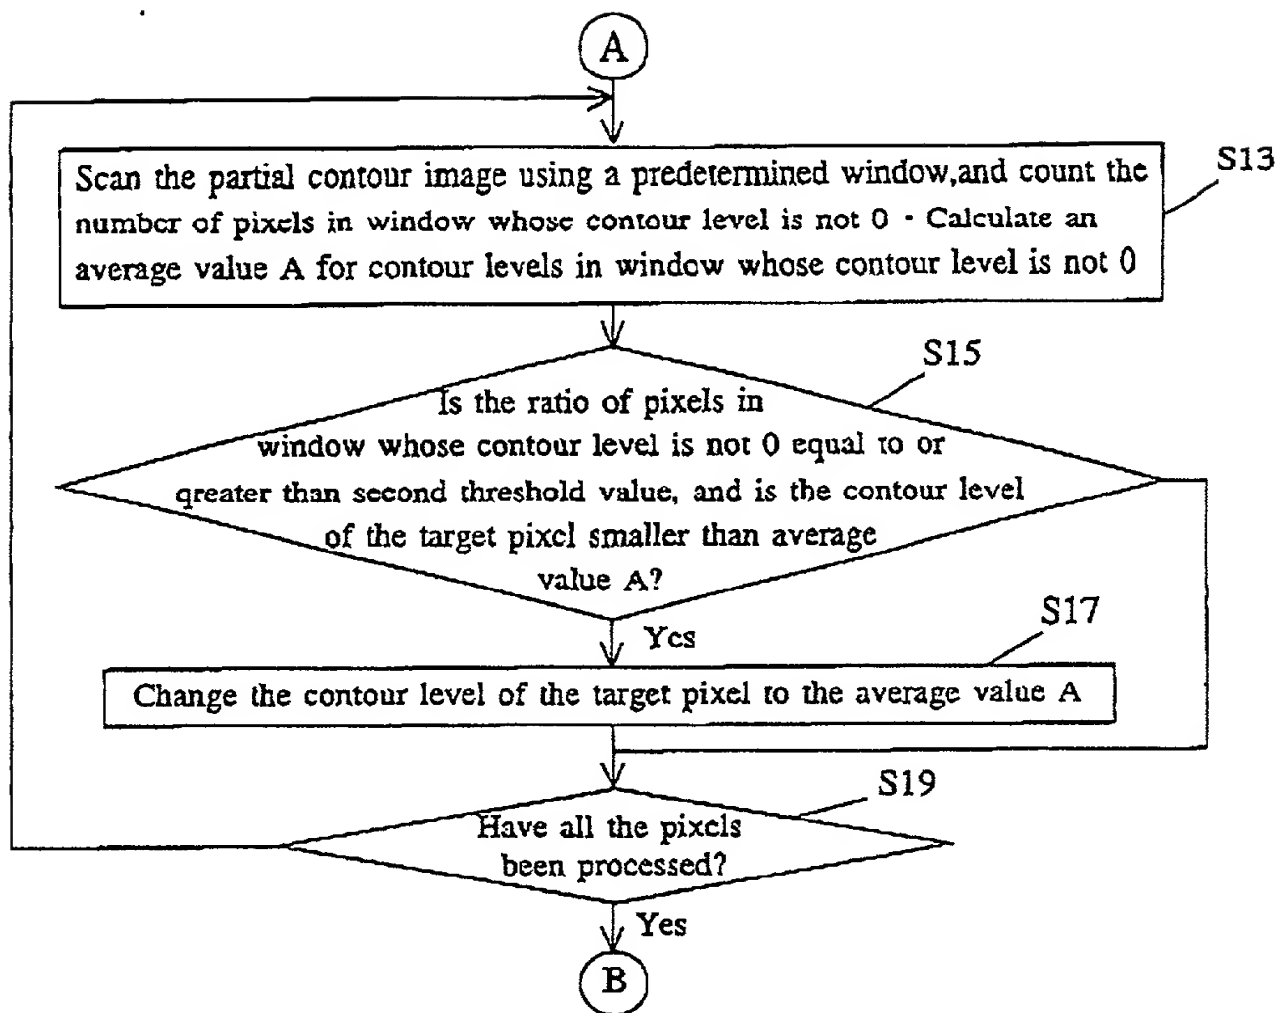


FIG.2b

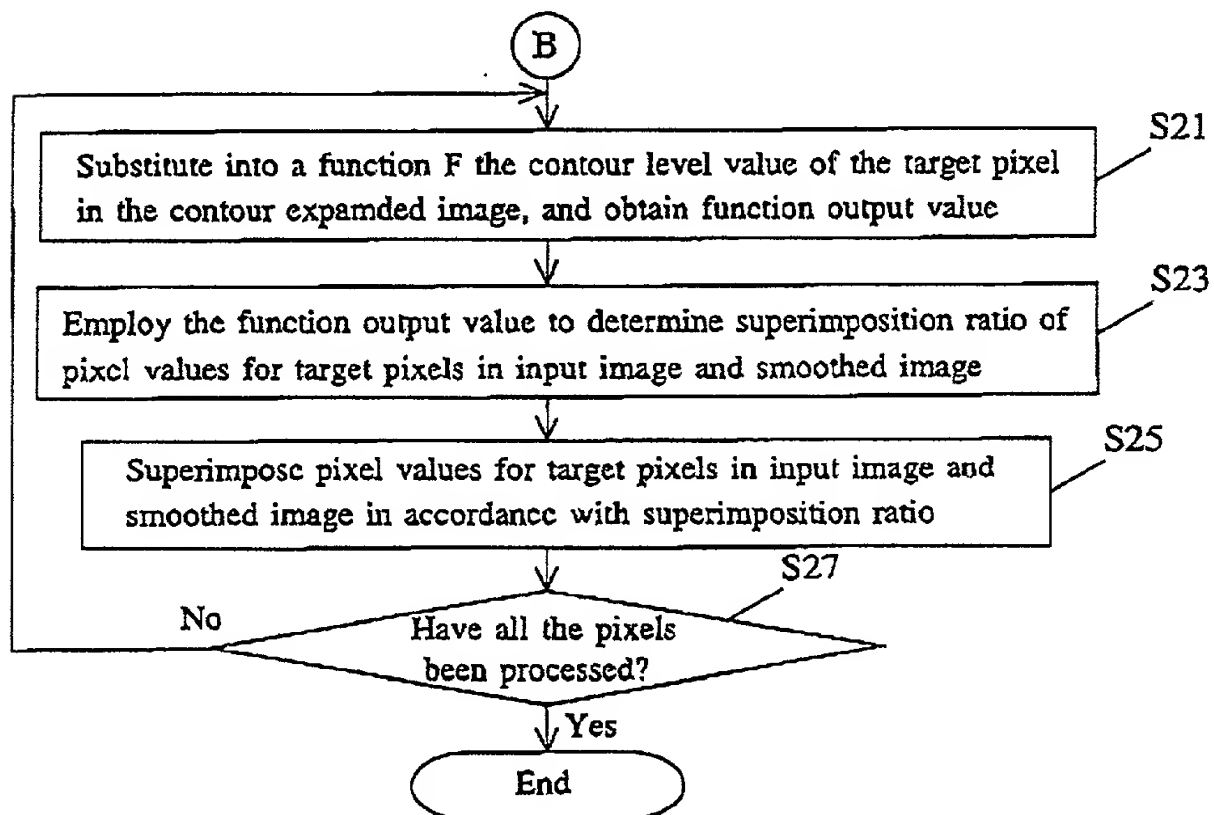


FIG.2c

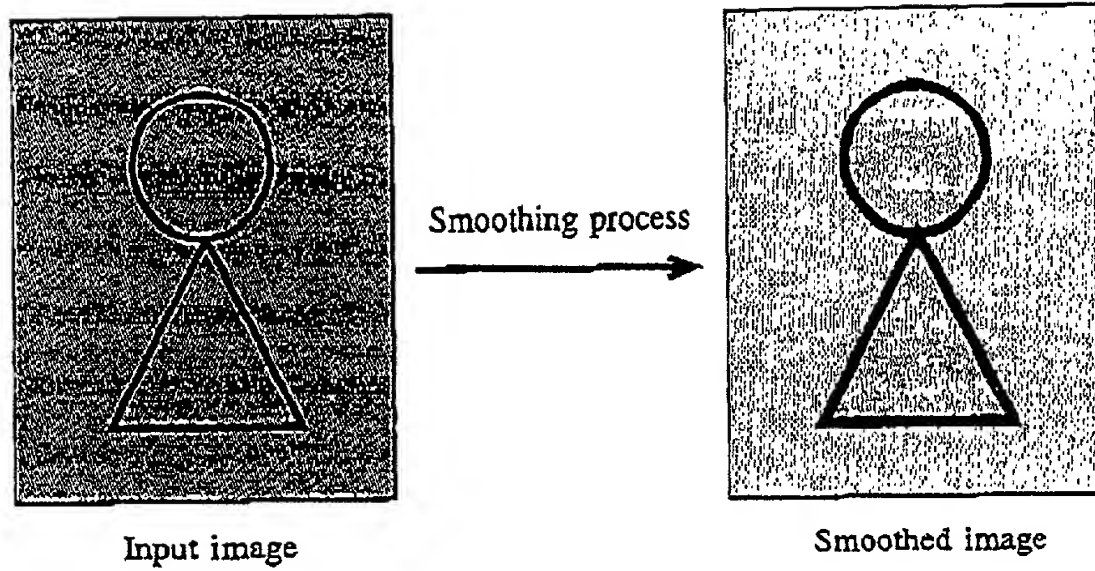


FIG.3

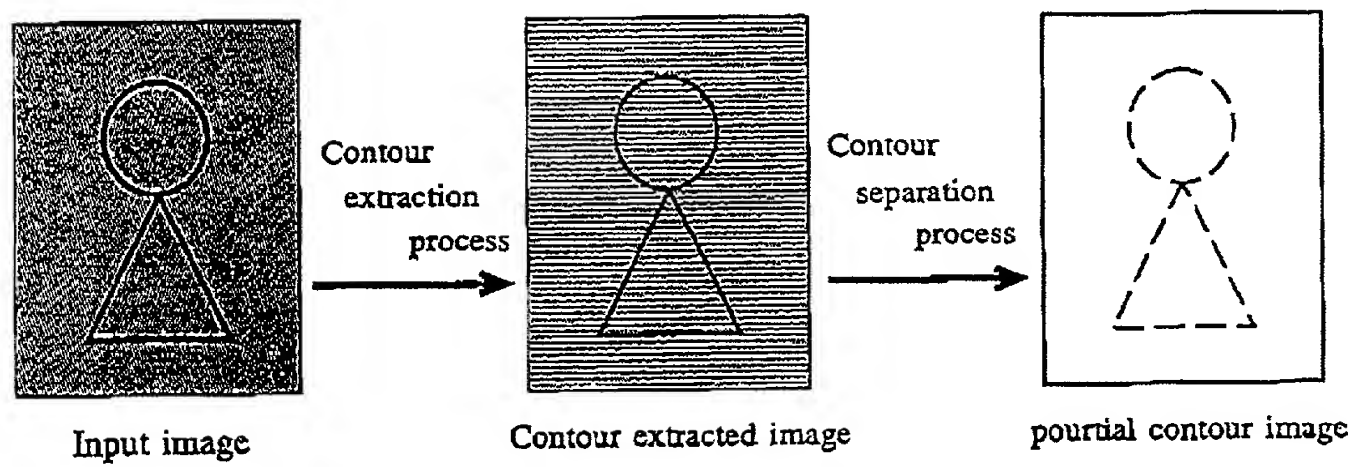


FIG.4

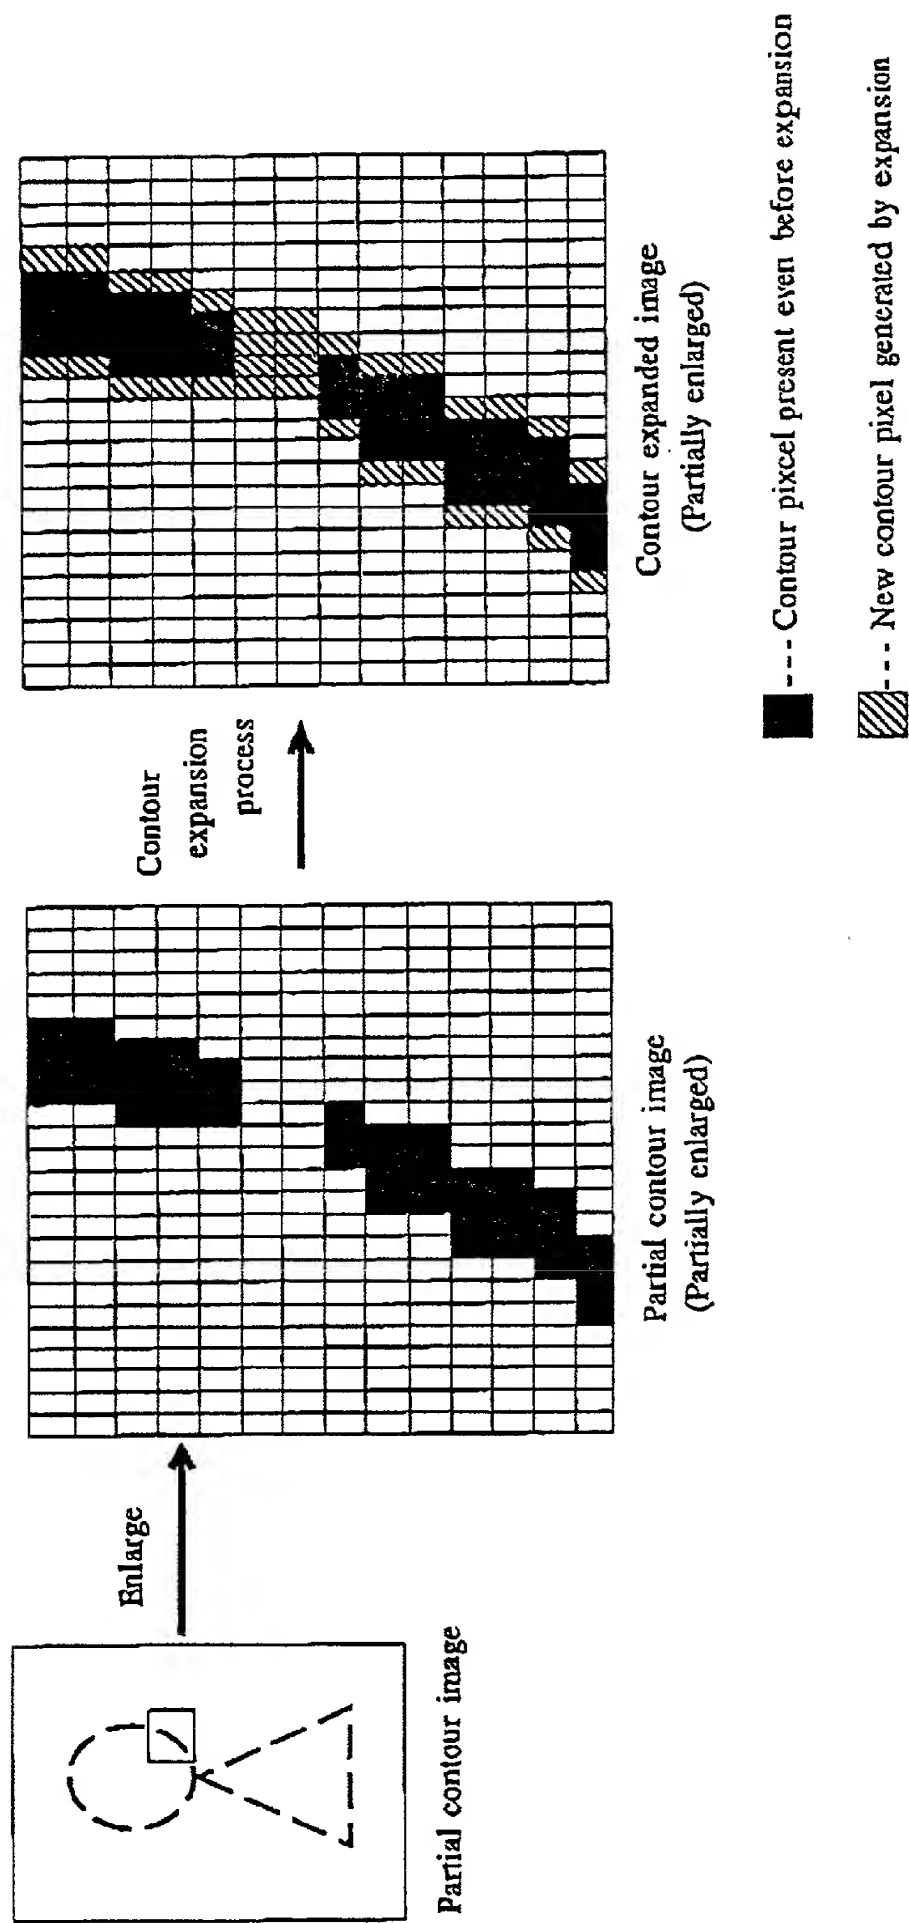


FIG.5

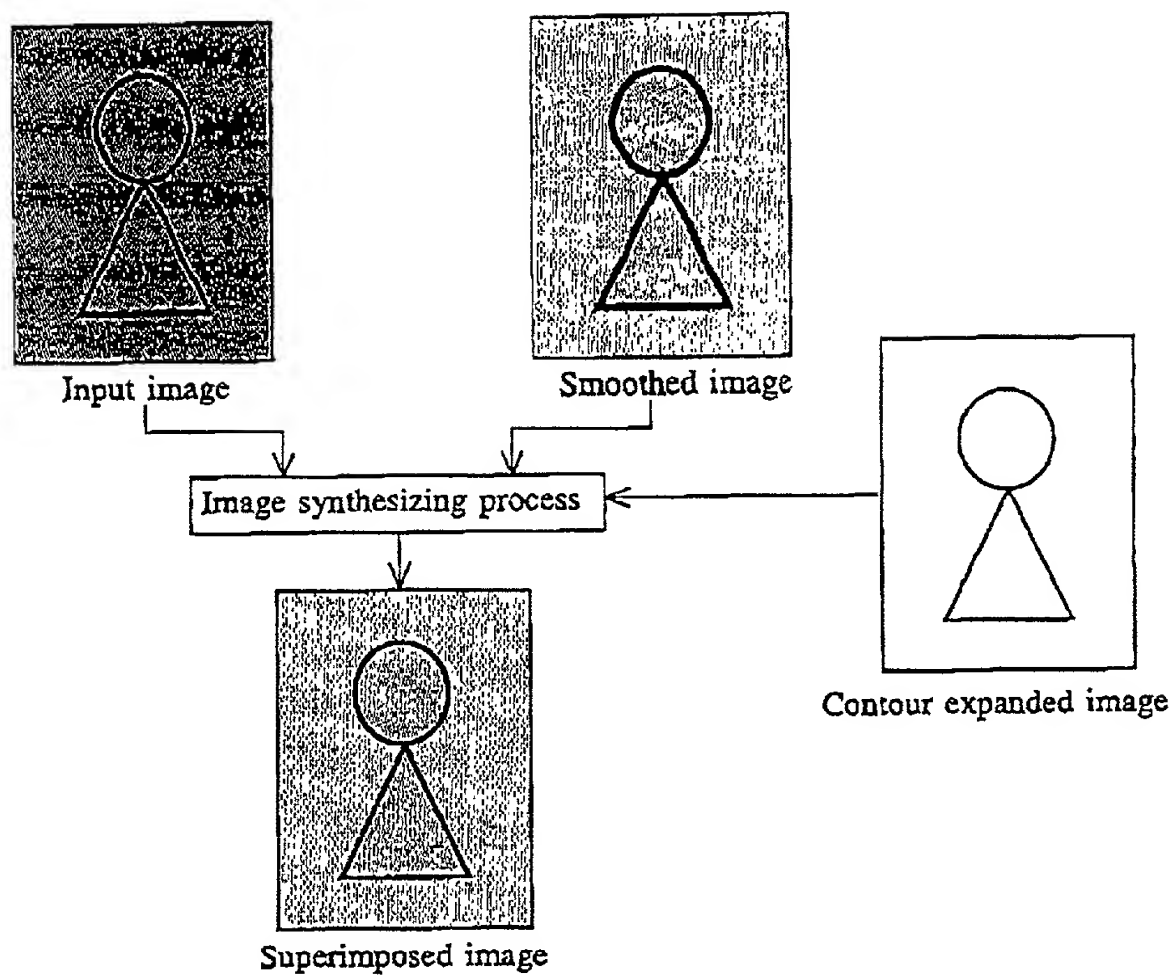


FIG.6

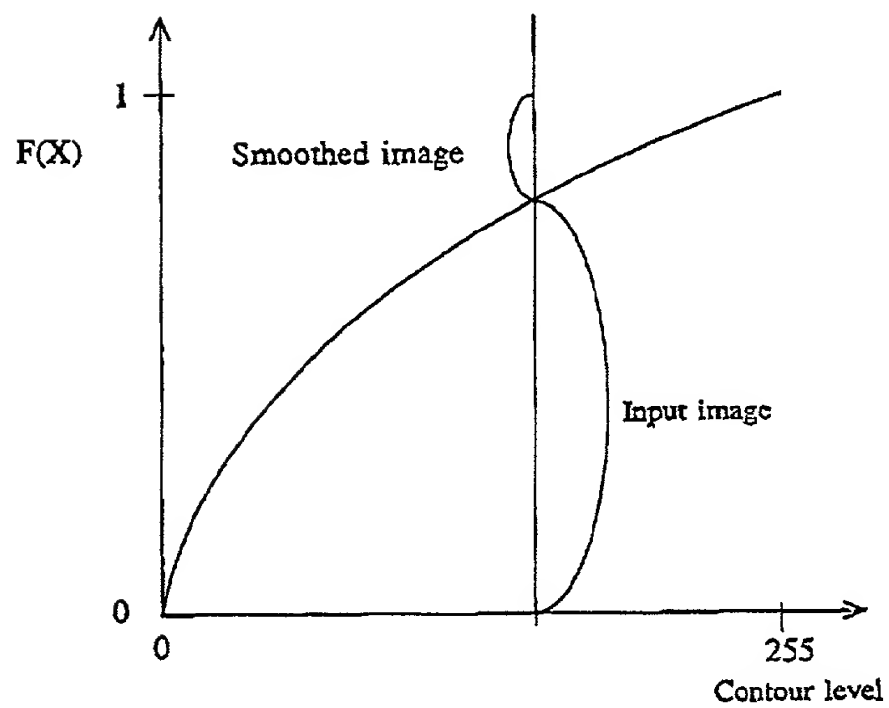


FIG.7

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Image Processing Apparatus

and Method

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-329000

(Number)

(番号)

Japan

(Country)

(国名)

(Number)

(番号)

(Country)

(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

19/11/1999

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の
 手続を米特許商標局に対して遂行する弁理士または代理人
 として、下記の者を指名いたします。(弁理士、または代理
 人の氏名及び登録番号を明記のこと)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,
 30,358; William F. Herbert, 31,024; Richard A. Golhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.
 Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756;
 George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M.
 Schertler, 35,348 (agent)

書類送付先

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)

Send Correspondence to:

STAAS & HALSEY
 700 Eleventh Street, N.W.
 Suite 500
 Washington, D.C. 20001

直接電話連絡先： (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
 (202) 434-1500

唯一または第一発明者名		Full name of sole or first inventor	
		Masahiro WATANABE	
発明者の署名	日付	Inventor's signature	Date
		<i>Masahiro Watanabe</i>	06/10/2000
住所		Residence	
		Kawasaki, Japan	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
c/o FUJITSU LIMITED			
1-1, Kamikodanaka 4-chome, Nakahara-ku			
Kawasaki-shi, Kanagawa 211-8588 Japan			
第二共同発明者		Full name of second joint inventor, if any	
		Akiko SAKAGUCHI	
第二共同発明者	日付	Second inventor's signature	Date
		<i>Akiko Sakaguchi</i>	06/10/2000
住所		Residence	
		Kawasaki, Japan	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
c/o FUJITSU LIMITED			
1-1, Kamikodanaka 4-chome, Nakahara-ku			
Kawasaki-shi, Kanagawa 211-8588 Japan			

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)

第三共同発明者		Full name of third joint inventor, if any	
		Koichi FUJIMURA	
第三共同発明者	日付	Third inventor's signature	Date
		Koichi Fujimura Koichi Fujimura	06/10/2000
住 所		Residence	
		Yokohama, Japan	
国 籍		Citizenship	
		Japan	
私書箱		Post Office Address	
		c/o FUJITSU PROGRAM LABORATORIES LIMITED	
		2-4-19, Shinyokohama Kouhoku-ku, Yokohama	
		222-0033 Japan	
第四共同発明者		Full name of fourth joint inventor, if any	
第四共同発明者	日付	Fourth inventor's signature	Date
住 所		Residence	
国 籍		Citizenship	
私書箱		Post Office Address	

第五共同発明者		Full name of fifth joint inventor, if any	
第五共同発明者	日付	Fifth inventor's signature	Date
住 所		Residence	
国 籍		Citizenship	
私書箱		Post Office Address	

第六共同発明者		Full name of sixth joint inventor, if any	
第六共同発明者	日付	Sixth inventor's signature	Date
住 所		Residence	
国 籍		Citizenship	
私書箱		Post Office Address	

(第七以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for seventh and subsequent joint inventors.)